


0.6/1kV CU/PVC/PVC (NYY) 3-CORE



Construction :

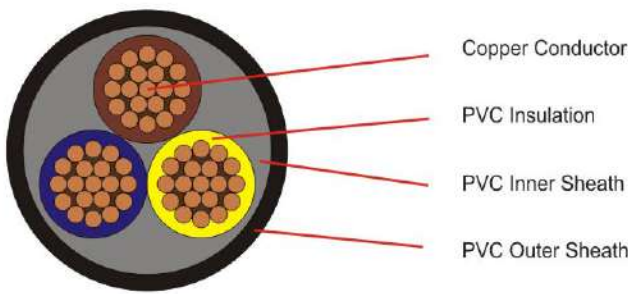

Application :

Applicable for indoor and outdoor installation
(No mechanical damage may come in contact)

Technical Data :

Standard : According to SNI IEC 60502-1: 2009,
SPLN D3.010-2: 2014

Testing Voltage : 3.5kV/5min

Special Features Upon Request

NYY

Nom. Cross. Sect.	Thickness of Insulation	Thickness of Outer Sheath	Approx. Overall Diameter	Current Carrying Capacity at 30 °C		Max. Conductor DC Resistance (20 °C)	Min. Insulation Resistance (20 °C)	Approx. Cable Weight	Standard Delivery Length
				In Ground	In Air				
mm ²	mm	mm	mm	A	A	Ω/km	MΩ/km	kg/km	m
1.5 re	0.8	1.8	11.2	24	18	12.1	50	181	1000/ Drum
1.5 rm	0.8	1.8	11.6	24	18	12.1	50	191	1000/ Drum
2.5 re	0.8	1.8	12.1	32	25	7.41	50	229	1000/ Drum
2.5 rm	0.8	1.8	12.6	32	25	7.41	50	245	1000/ Drum
4 re	1.0	1.8	14.0	41	34	4.61	50	319	1000/ Drum
4 rm	1.0	1.8	14.6	41	34	4.61	50	342	1000/ Drum
6 re	1.0	1.8	15.1	52	44	3.08	50	401	1000/ Drum
6 rm	1.0	1.8	15.9	52	44	3.08	50	433	1000/ Drum
10 re	1.0	1.8	17.1	69	60	1.83	50	578	1000/ Drum
10 rm	1.0	1.8	17.8	69	60	1.83	50	596	1000/ Drum
16 rm	1.0	1.8	20.0	89	80	1.15	40	822	1000/ Drum
25 rm	1.2	1.8	23.6	116	105	0.727	40	1213	1000/ Drum
35 rm	1.2	1.8	26.0	138	130	0.524	40	1565	1000/ Drum
50 sm	1.4	1.8	25.3	165	160	0.387	30	1898	1000/ Drum
70 sm	1.4	2.0	28.6	205	200	0.268	30	2580	1000/ Drum
95 sm	1.6	2.1	32.7	245	245	0.193	30	3485	1000/ Drum
120 sm	1.6	2.2	35.5	285	285	0.153	30	4312	1000/ Drum
150 sm	1.8	2.3	39.2	315	325	0.124	20	5300	500/ Drum
185 sm	2.0	2.5	43.8	355	370	0.0991	20	6478	500/ Drum
240 sm	2.2	2.7	49.3	415	435	0.0754	20	8491	500/ Drum
300 sm	2.4	3.1	55.0	535	600	0.0601	20	10650	500/ Drum