


0.6/1kV CU/PVC/PVC (NYY) 4-CORE



 Construction :

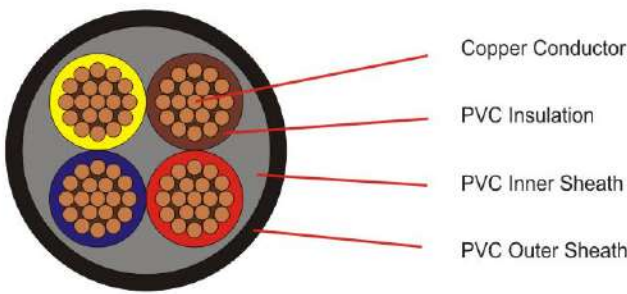

 Application :

Applicable for indoor and outdoor installation
(No mechanical damage may come in contact)

 Technical Data :

Standard : According to SNI IEC 60502-1: 2009,
SPLN D3.010-2: 2014
Testing Voltage : 3.5kV/5min

 Special Features Upon Request

NYY

Nom. Cross. Sect.	Thickness of Insulation	Thickness of Outer Sheath	Approx. Overall Diameter	Current Carrying Capacity at 30 °C		Max. Conductor DC Resistance (20 °C)	Min. Insulation Resistance (20 °C)	Approx. Cable Weight	Standard Delivery Length
				In Ground	In Air				
mm ²	mm	mm	mm	A	A	Ω/km	MΩ/km	kg/km	m
1.5 re	0.8	1.8	12.0	24	18	12.1	50	213	1000/ Drum
1.5 rm	0.8	1.8	12.4	24	18	12.1	50	224	1000/ Drum
2.5 re	0.8	1.8	13.0	32	25	7.41	50	273	1000/ Drum
2.5 rm	0.8	1.8	13.6	32	25	7.41	50	292	1000/ Drum
4 re	1.0	1.8	15.1	41	34	4.61	50	385	1000/ Drum
4 rm	1.0	1.8	15.8	41	34	4.61	50	413	1000/ Drum
6 re	1.0	1.8	16.3	52	44	3.08	50	490	1000/ Drum
6 rm	1.0	1.8	17.2	52	44	3.08	50	527	1000/ Drum
10 re	1.0	1.8	20.3	69	60	1.83	50	724	1000/ Drum
10 rm	1.0	1.8	21.0	69	60	1.83	50	743	1000/ Drum
16 rm	1.0	1.8	24.0	89	80	1.15	40	1035	1000/ Drum
25 rm	1.2	1.8	28.0	116	105	0.727	40	1541	1000/ Drum
35 rm	1.2	1.8	30.0	138	130	0.524	40	1999	1000/ Drum
50 sm	1.4	1.9	32.0	165	160	0.387	30	2498	1000/ Drum
70 sm	1.4	2.1	36.0	205	200	0.268	30	3374	1000/ Drum
95 sm	1.6	2.2	40.0	245	245	0.193	30	4536	1000/ Drum
120 sm	1.6	2.3	44.0	285	285	0.153	30	5676	1000/ Drum
150 sm	1.8	2.5	49.0	315	325	0.124	20	6910	500/ Drum
185 sm	2.0	2.7	53.0	355	370	0.0991	20	8596	500/ Drum
240 sm	2.2	2.9	60.0	415	435	0.0754	20	11087	500/ Drum
300 sm	2.4	3.1	66.0	465	500	0.0601	20	13549	500/ Drum