


0.6/1kV CU/PVC/PVC (NYY) 5-CORE



Construction :

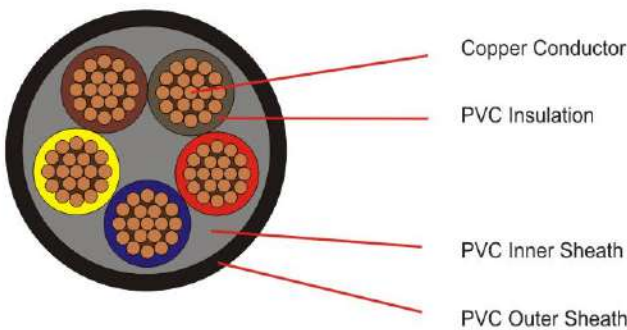

Application :

Applicable for indoor and outdoor installation
(No mechanical damage may come in contact)

Technical Data :

Standard : According to SNI IEC 60502-1: 2009,
SPLN D3.010-2: 2014
Testing Voltage : 3.5kV/5min

Special Features Upon Request

Nom. Cross. Sect.	Thickness of Insulation	Thickness of Outer Sheath	Approx. Overall Diameter	Current Carrying Capacity at 30 °C		Max. Conductor DC Resistance (20 °C)	Min. Insulation Resistance (20 °C)	Approx. Cable Weight	Standard Delivery Length
				In Ground	In Air				
mm ²	mm	mm	mm	A	A	Ω/km	MΩ/km	kg/km	m
1.5 re	0.8	1.8	12.8	24	18	12.1	50	255	1000/ Drum
1.5 rm	0.8	1.8	13.3	24	18	12.1	50	268	1000/ Drum
2.5 re	0.8	1.8	14.0	32	25	7.41	50	329	1000/ Drum
2.5 rm	0.8	1.8	14.6	32	25	7.41	50	352	1000/ Drum
4 re	1.0	1.8	16.3	41	34	4.61	50	470	1000/ Drum
4 rm	1.0	1.8	17.0	41	34	4.61	50	505	1000/ Drum
6 re	1.0	1.8	17.7	52	44	3.08	50	602	1000/ Drum
6 rm	1.0	1.8	18.6	52	44	3.08	50	650	1000/ Drum
10 re	1.0	1.8	20.4	69	60	1.83	50	893	1000/ Drum
10 rm	1.0	1.8	21.1	69	60	1.83	50	912	1000/ Drum
16 rm	1.0	1.8	23.8	89	80	1.15	40	1279	1000/ Drum
25 rm	1.2	1.8	28.3	116	105	0.727	40	1914	1000/ Drum
35 rm	1.2	1.9	31.5	138	130	0.524	40	2505	1000/ Drum
50 rm	1.4	2.0	36.4	165	160	0.387	30	3273	1000/ Drum

NYY