


0.6/1kV AL/XLPE-T (NFA2X-T)



Construction :

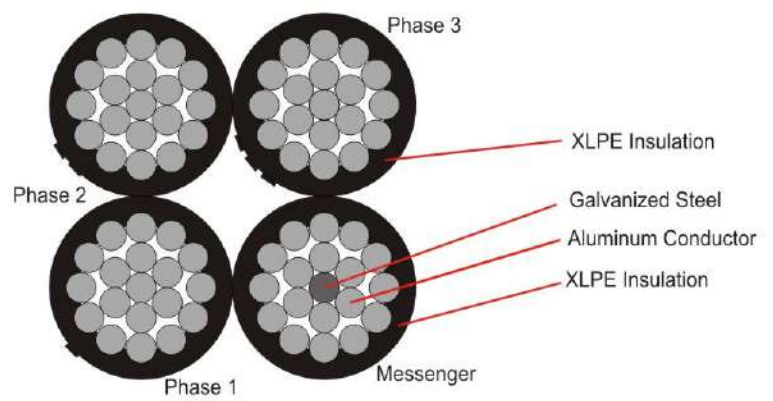

Application :

Bundle conductor for overhead distribution network and service drop cable

Technical Data :

Standard : According to SNI IEC 60502-1: 2009, SPLN D3.010-1: 2014, ADENDUM SPLN D3.010-1: 2015

Standard Delivery Length is multiple of 500.

Testing Voltage : 3.5kV/5min.

Special Features Upon Request

No. of Wires and Nom. Cross.Sect. Sect.	Phase Core			Messenger Core			Lay Length		Max. Current Capacity in Air (30 °C) Amp.	Approx. Cable Weight kg/km	Standard Delivery Length kg/km
	Thickness of Insulation mm	Approx. Overall Diameter mm	Max. DC Resistance (20 °C) Ω/km	Thickness of Insulation mm	Approx. Overall Diameter mm	Max. DC Resistance (20 °C) Ω/km	Min	Max			
							cm	cm			
2x35+35	1.6	11.2	0.868	1.5	12.0	0.836	36	73	125	479	1000/ Drum
2x50+50	1.6	12.6	0.641	1.6	13.5	0.585	41	82	154	643	1000/ Drum
2x70+70	1.8	15.4	0.443	1.6	15.5	0.418	50	100	196	898	1000/ Drum
3x35+35	1.6	11.2	0.868	1.5	12.0	0.836	41	81	125	622	1000/ Drum
3x50+50	1.6	12.6	0.641	1.6	13.5	0.585	46	91	154	1018	1000/ Drum
3x70+70	1.8	15.4	0.443	1.6	15.5	0.418	56	112	196	1165	1000/ Drum
3x95+95	1.8	16.9	0.320	1.6	18.1	0.308	63	125	242	1497	1000/ Drum
3x120+95	1.8	18.5	0.253	1.6	18.1	0.308	72	144	296	1845	1000/ Drum