


# 0.6/1kV AL/XLPE (NFA2X)



### Construction :

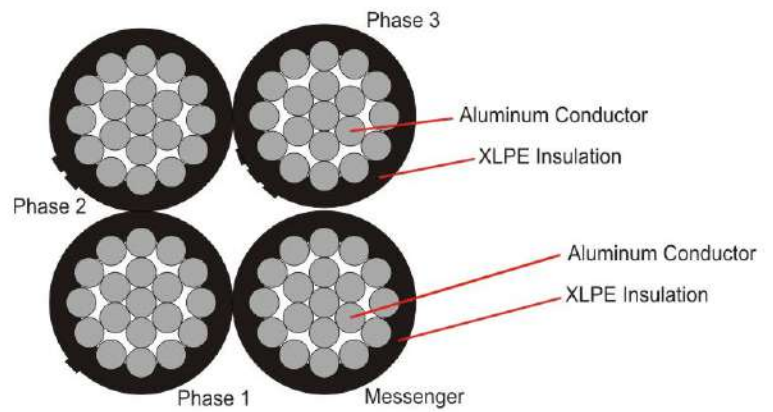

### Application :

Bundle conductor for overhead distribution network and service drop cable

### Technical Data :

Standard : According to SNI IEC 60502-1: 2009, SPLN D3.010-1: 2014, ADENDUM SPLN D3.010-1 : 2015

Standard Delivery Length is multiple of 1000.

Testing Voltage : 3.5kV/5min

### Special Features Upon Request

No. Of Cores & Nominal Cross Sect.	Thickness of Insulation	Approx. Outer Diameter	Max. DC Resistance (20 °C)	Lay Length		Max. Current Capacity in Air (35 °C)	Approx. Cable Weight	Standard Delivery Length
				Min	Max			
mm <sup>2</sup>	mm	mm	Ω/km	cm	cm	A	kg/km	m
2x10	1.2	7.0	3.08	21	35	54	100	3000/ Drum
2x16	1.2	8.1	1.91	23	38	72	144	3000/ Drum
4x10	1.2	7.0	3.08	25	42	54	200	2000/ Drum
4x16	1.2	8.1	1.91	28	46	71	288	2000/ Drum
4x25	1.4	10.0	1.20	35	58	102	438	2000/ Drum
4x35	1.6	11.2	0.868	41	67	125	604	2000/ Drum