


300/500V CU/PVC/PVC (NYM) 5-CORE



Construction :

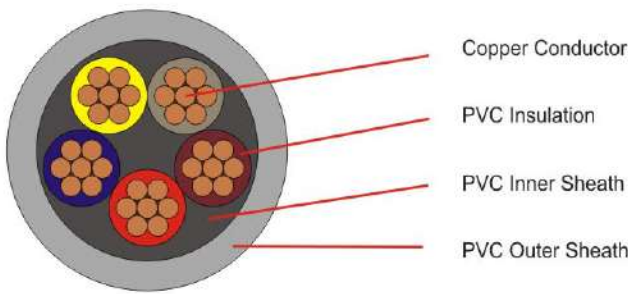

Application :

Permanent installation in conduit or exposed dry area

Technical Data :

Standard : According to SNI 04-6629.4.2006,
IEC 60227-4 : 1997

Testing Voltage : 2.0kV/5min

Special Features Upon Request

Nom. Cross. Sect.	Thickness of Insulation	Thickness of Inner Sheath	Thickness of Outer Sheath	Approx. Overall Diameter	Current Carrying Capacity		Max. Conductor DC Resistance (20 °C)	Min. Insulation Resistance (20 °C)	Approx. Cable Weight	Standard Delivery Length
					In Air (30 °C)	In Air (40 °C)				
mm ²	mm	mm	mm	mm	A	A	Ω/km	MΩ/km	kg/km	m
1.5 re	0.7	0.4	1.2	10.7	19	16	12.1	50	189	100/ Coil
1.5 rm	0.7	0.4	1.2	11.1	19	16	12.1	50	201	100/ Coil
2.5 re	0.8	0.4	1.2	11.8	25	22	7.41	50	256	100/ Coil
2.5 rm	0.8	0.4	1.2	12.5	25	22	7.41	50	276	100/ Coil
4 re	0.8	0.6	1.4	14.0	34	30	4.61	50	377	100/ Coil
4 rm	0.8	0.6	1.4	14.8	34	30	4.61	50	407	100/ Coil
6 re	0.8	0.6	1.4	15.4	44	39	3.08	50	499	100/ Coil
6 rm	0.8	0.6	1.4	16.4	44	39	3.08	50	540	100/ Coil
10 re	1.0	0.6	1.4	19.5	61	53	1.83	50	827	100/ Coil
10 rm	1.0	0.6	1.4	20.2	61	53	1.83	50	854	100/ Coil
16 rm	1.0	0.8	1.6	23.0	82	71	1.15	40	1208	1000/ Drum
25 rm	1.2	1.0	1.6	28.3	108	94	0.727	40	1874	1000/ Drum
35 rm	1.2	1.2	1.6	31.7	134	117	0.524	40	2471	1000/ Drum

NYM