


ALUMINIUM EC WIRE & ALLOY WIRE



Construction :

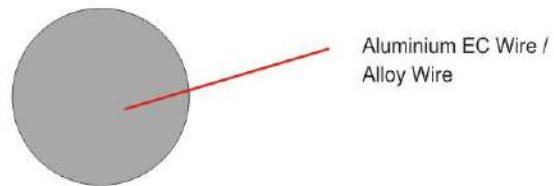

Application :

Generally used for electrical purpose such as conductors, transformer, etc.

Technical Data :

Standard : According to ASTM-B230 (EC Wire), ASTM-B211 (Alloy Wire) or upon to Customer request.

Special Features Upon Request

TYPE	Temper	Size Diameter	Tensile Strength	Conductivity (Min.)	Resistivity (Max.)
		mm	Kg/mm ²	% IACS	Ω mm ² /m
EC 1350	H0	Ø 7.6 Ø 9.5 Ø 12.0	6.02 - 9.90	61.8	0.027899
	H12		8.47 - 11.94	61.5	0.028035
	H14		10.51 - 14.08	61.4	0.028080
	H16		11.94 - 15.51	61.3	0.028126
ALLOY 6201	T4		15.30 - 24.49	51.3	0.033608

ALUMINIUM REDRAW ROD
EC & ALLOY