


0.6/1kV AL/XLPE/DSTA/PVC (NA2XBY) 2-CORE



Construction :

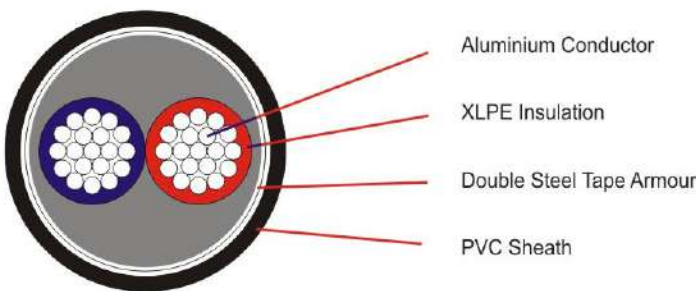

Application :

For indoors, outdoors, cable channels, installation as underground, power station

Technical Data :

Standard : According to SNI IEC 60502-1 : 2009

Testing Voltage : 3.5kV/5min

Special Features Upon Request

Nom. Cross Sect.	Thickness of Insulation	Thickness of Inner Sheath	Thickness of Steel Tape	Thickness of Outer Sheath	Approx. Overall Diameter	Current Carrying Capacity at 30 °C		Max. Conductor DC Resistance (20 °C)	Min. Insulation Resistance (20 °C)	Approx. Cable Weight	Standard Delivery Length
						In Ground	In Air				
mm ²	mm	mm	mm	mm	mm	A	A	Ω/km	MΩ/km	kg/km	m
25 rm	0.9	1.0	0.2	1.8	22.2	130	119	1.200	1100	788	1000/ Drum
35 rm	0.9	1.0	0.2	1.8	24.5	157	145	0.868	1000	950	1000/ Drum
50 rm	1.0	1.0	0.2	1.8	27.6	185	175	0.641	900	1200	1000/ Drum
70 rm	1.1	1.0	0.2	1.9	31.5	229	220	0.443	900	1526	1000/ Drum
95 rm	1.1	1.2	0.2	2.0	36.3	276	272	0.320	800	2023	1000/ Drum
120 rm	1.2	1.2	0.5	2.2	40.2	320	317	0.253	800	2646	1000/ Drum
150 rm	1.4	1.2	0.5	2.3	44.5	351	362	0.206	800	3150	500/ Drum
185 rm	1.6	1.4	0.5	2.5	49.5	400	420	0.164	800	3890	500/ Drum
240 rm	1.7	1.4	0.5	2.6	55.3	467	497	0.125	700	4752	500/ Drum
300 rm	1.8	1.6	0.5	2.8	61.2	532	577	0.100	700	5750	500/ Drum