


0.6/1kV AL/XLPE/PVC (NA2XY) 2-CORE



Construction :

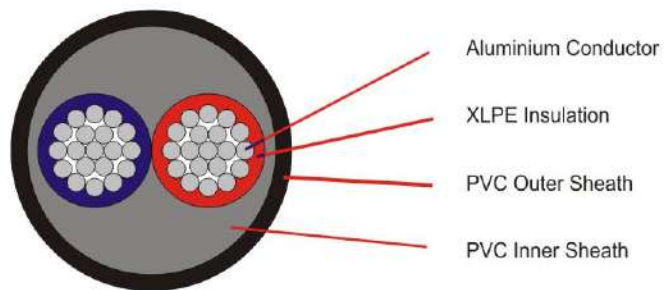

Application :

Indoor, outdoor, in duct installation, buried in the ground, power stations

Technical Data :

Standard : According to SNI IEC 60502-1 : 2009

Testing Voltage : 3.5kV/5min

Special Features Upon Request

Nom. Cross. Sect.	Thickness of Insulation	Thickness of Inner Sheath	Thickness of Outer Sheath	Approx. Overall Diameter	Current Carrying Capacity at 30 °C		Max. Conductor DC Resistance (20 °C)	Min. Insulation Resistance (20 °C)	Approx. Cable Weight	Standard Delivery Length
					In Ground	In Air				
mm ²	mm	mm	mm	mm	A	A	Ω/km	MΩ/km	kg/km	m
25 rm	0.9	1.0	1.8	21.6	130	119	1.200	1100	590	1000/ Drum
35 rm	0.9	1.0	1.8	24.0	157	145	0.868	1000	734	1000/ Drum
50 rm	1.0	1.0	1.8	27.1	185	175	0.641	900	946	1000/ Drum
70 rm	1.1	1.0	1.8	30.7	229	220	0.443	900	1223	1000/ Drum
95 rm	1.1	1.2	2.0	35.3	276	272	0.320	800	1633	1000/ Drum
120 rm	1.2	1.2	2.1	39.0	320	317	0.253	800	1975	1000/ Drum
150 rm	1.4	1.2	2.2	43.2	351	362	0.206	800	2427	500/ Drum
185 rm	1.6	1.4	2.3	48.2	400	420	0.164	800	3028	500/ Drum
240 rm	1.7	1.4	2.5	54.2	467	497	0.125	700	3838	500/ Drum
300 rm	1.8	1.6	2.7	60.0	532	577	0.100	700	4742	500/ Drum