


0.6/1kV AL/XLPE/PVC (NA2XY) 3-CORE



 Construction :

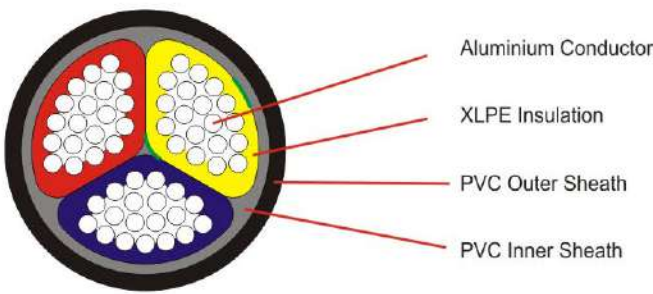

 Application :

Indoor, outdoor, in duct installation, buried in the ground, power stations

 Technical Data :

Standard : According to SNI IEC 60502-1 : 2009

Testing Voltage : 3.5kV/5min

 Special Features Upon Request

Nom. Cross. Sect.	Thickness of Insulation	Thickness of Inner Sheath	Thickness of Outer Sheath	Approx. Overall Diameter	Current Carrying Capacity at 30 °C		Max. Conductor DC Resistance (20 °C)	Min. Insulation Resistance (20 °C)	Approx. Cable Weight	Standard Delivery Length
					In Ground	In Air				
mm ²	mm	mm	mm	mm	A	A	Ω/km	MΩ/km	kg/km	m
25 sm	0.9	1.0	1.8	23.0	110	100	1.200	1100	670	1000/ Drum
35 sm	0.9	1.0	1.8	25.3	132	123	0.868	1000	836	1000/ Drum
50 sm	1.0	1.0	1.8	27.4	156	149	0.641	900	912	1000/ Drum
70 sm	1.1	1.2	1.9	31.2	193	189	0.443	900	1224	1000/ Drum
95 sm	1.1	1.2	2.0	34.2	232	233	0.320	800	1538	1000/ Drum
120 sm	1.2	1.2	2.1	37.2	268	271	0.253	800	1887	1000/ Drum
150 sm	1.4	1.4	2.3	41.6	296	310	0.206	800	2370	500/ Drum
185 sm	1.6	1.4	2.4	45.4	336	359	0.164	800	2845	500/ Drum
240 sm	1.7	1.6	2.6	50.6	429	429	0.125	700	3636	500/ Drum
300 sm	1.8	1.6	2.8	55.0	447	496	0.100	700	4392	500/ Drum