


0.6/1kV AL/XLPE/PVC (NA2XY) 4-CORE



Construction :

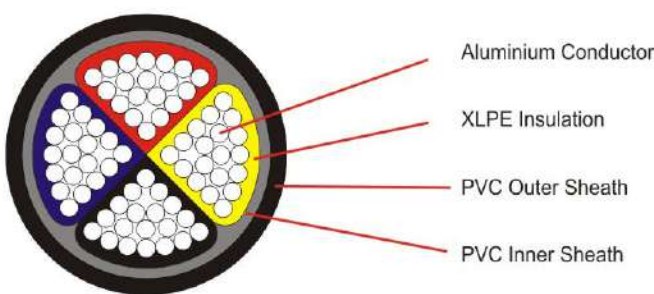

Application :

Indoor, outdoor, in duct installation, buried in the ground, power stations

Technical Data :

Standard : According to SNI IEC 60502-1 : 2009

Testing Voltage : 3.5kV/5min

Special Features Upon Request

Nom. Cross. Sect.	Thickness of Insulation	Thickness of Inner Sheath	Thickness of Outer Sheath	Approx. Overall Diameter	Current Carrying Capacity at 30 °C		Max. Conductor DC Resistance (20 °C)	Min. Insulation Resistance (20 °C)	Approx. Cable Weight	Standard Delivery Length
					In Ground	In Air				
mm ²	mm	mm	mm	mm	A	A	Ω/km	MΩ/km	kg/km	m
25 sm	0.9	1.0	1.8	24.8	110	110	1.200	1100	783	1000/ Drum
35 sm	0.9	1.0	1.8	27.6	132	123	0.868	1000	985	1000/ Drum
50 sm	1.0	1.0	1.9	29.2	156	149	0.641	900	1114	1000/ Drum
70 sm	1.1	1.2	2.0	33.4	193	189	0.443	900	1516	1000/ Drum
95 sm	1.1	1.2	2.1	37.5	232	233	0.320	800	1948	1000/ Drum
120 sm	1.2	1.4	2.3	42.0	268	271	0.253	800	2476	1000/ Drum
150 sm	1.4	1.4	2.4	46.3	296	310	0.206	800	3033	500/ Drum
185 sm	1.6	1.4	2.6	51.3	336	359	0.164	800	3698	500/ Drum
240 sm	1.7	1.6	2.8	59.0	393	429	0.125	700	4850	500/ Drum
300 sm	1.8	1.6	3	64.3	447	496	0.100	700	5756	500/ Drum