


0.6/1kV AL/PVC/DSTA/PVC (NAYBY) 2-CORE



Construction :

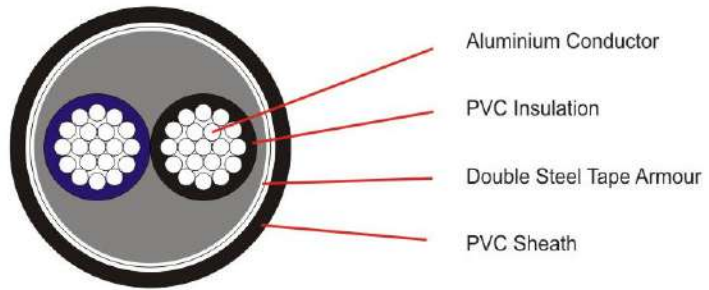

Application :

For indoor in ducts, transmission and distribution of electric power in fixed installations

Technical Data :

Standard : According to SNI IEC 60502-1 : 2009

Testing Voltage : 3.5kV/5min

Special Features Upon Request

Nom. Cross. Sect.	Thickness of Insulation	Thickness of Inner Sheath	Thickness of Steel Tape	Thickness of Outer Sheath	Approx. Overall Diameter	Current Carrying Capacity at 30 °C		Max. Conductor DC Resistance (20 °C)	Min. Insulation Resistance (20 °C)	Approx. Cable Weight	Standard Delivery Length
						In Ground	In Air				
mm ²	mm	mm	mm	mm	mm	A	A	Ω/km	MΩ/km	kg/km	m
25 mm	1.2	1.0	0.2	1.8	23.4	102	94	1.200	40	887	1000/ Drum
35 mm	1.2	1.0	0.2	1.8	25.8	125	115	0.868	40	1060	1000/ Drum
50 mm	1.4	1.0	0.2	1.8	29.3	147	140	0.641	30	1360	1000/ Drum
70 mm	1.4	1.0	0.2	1.9	32.6	178	180	0.443	30	1675	1000/ Drum
95 mm	1.6	1.2	0.5	2.1	38.5	220	215	0.320	30	2486	1000/ Drum
120 mm	1.6	1.2	0.5	2.2	41.8	245	250	0.253	30	2895	1000/ Drum
150 mm	1.8	1.2	0.5	2.4	46.2	280	290	0.206	20	3455	500/ Drum
185 mm	2.0	1.4	0.5	2.5	51.1	315	335	0.164	20	4187	500/ Drum
240 mm	2.2	1.4	0.5	2.7	57.5	370	395	0.125	20	5213	500/ Drum
300 mm	2.4	1.6	0.5	2.9	63.8	415	460	0.100	20	6336	500/ Drum