


GALVANIZED STEEL ARMOURING ROUND WIRE

 Construction :

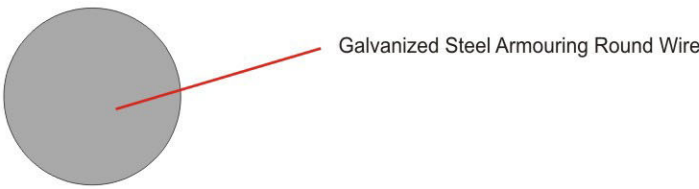

 Application :
Generally used for the armouring of land cables.

 Technical Data :
Standard : According to BS 1442 (EN 10257-1),
BS 443 (EN 10244-2)

 Special Features Upon Request

Armouring Round Wire						
Diameter	Tolerance on Diameter	Tensile Strength	Elongation	Torsion	Mass of Zinc Coating	Maximum DC Resistance (20 °C)
mm	mm	MPa	%	Times	g/m²	Ω/km
0.90	±0.025	340 - 500	Min. 10	Min. 33	Min. 150	216.9
1.25	±0.035	340 - 500	Min. 10	Min. 24	Min. 200	112.45
1.60	±0.045	340 - 500	Min. 10	Min. 37	Min. 230	68.64
2.00	±0.050	340 - 500	Min. 10	Min. 30	Min. 240	43.93
2.50	±0.065	340 - 500	Min. 10	Min. 24	Min. 260	28.11
3.15	±0.080	340 - 500	Min. 10	Min. 19	Min. 275	17.71